



A4 FLEXA MILLE

WHEELCHAIR PLATFORM / GOODS LIFT

Level Access Lifts Ltd, Oceanic House, Cracknore Hard,
Marchwood, Southampton, SO40 4ZD
Tel: 0845 4662 999 Fax: 0845 4662 777
Email: info@levellifts.co.uk Web: www.levellifts.co.uk

THE A4 Flexa Mille

A4 Flexa Mille is a platform lift developed and designed to carry heavy loads up to 1000kg. Because of its flexible platform configurations and design the lift is useful in all sorts of environments: self-storage facilities, offices, apartments, shops, schools, hotels, restaurants, factories, public buildings and private homes.

A4 Flexa Mille is a screw driven vertical platform lift with a self sustained shaft enclosure. The lift requires very little construction work, needs only a shallow pit and does not require a machine room. The lift can be installed direct on the floor and delivered with a prefabricated shaft made of steel panels or panels made of laminated safety glass. As standard, the lift is equipped with an emergency stop and alarm device. As always, the designers have developed a lift that puts safety first. All edges of the platform have safety edges that stop the lift immediately when touched. The speed is limited to 0.15m/s and the control system is a 'hold to run' type on the lift platform (one touch buttons on the landings).

The A4 Flexa Mille is EC-type tested and certified by the Notified Body DNV, Det Norske Veritas, according to the European Machinery Directive 2006/42/EC and the forthcoming European Standard for platform lifts.






THE A4 FLEXA MILLE TECHNICAL INFORMATION

- Platform width:
1005mm - 1405mm (1405 Standard)
- Platform length:
1480mm - 2480mm (1980 Standard)
- Stops: 2 - 7
- Load: 1000kg
- Speed: 0.15 m/s
- Travel: Max 13m
- Pit: 200mm
- Self-sustaining screw and nut
- Operating system: Hold to run controls on carriage - one touch buttons on landings
- Doors:
1300mm x 2000mm or 900mm x 1100mm
- Single hinged doors with panoramic window. Doors hold themselves open when fully opened
- Electrical door locks as standard
- Electrical emergency lowering as standard
- Power Supply: 400V, 3 phase
- Finish: RAL 9010
- Soft start / soft stop

OPTIONS

- Non standard platform (in steps of 100mm)
- Arrival chimes
- Automatic light system
- Different RAL colours
- Different doors (A13, A14, E160 & A41)
- Emergency telephone / Autodialler
- Three side glazing
- Pull down seat
- Voice annunciation
- Elbow button
- External control box

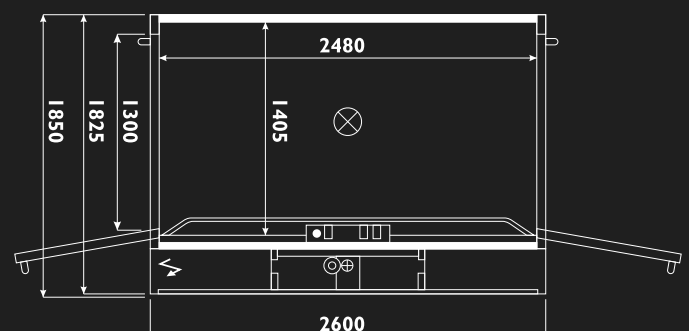

Largest platform size shown